



SAVEAIR
Technologies Pvt Ltd



Product Catalogue

Contact For Any Enquiry

📍 25/1, 12th Avenue, Ashok Nagar, Chennai-600083.

☎ 044- 4858 4456 📞 9840261043

✉ marketing@saveairtechnologies.com

🌐 www.saveairtechnologies.com

Electronic Timer - Series Micon® 225

- True OFF Delay (Power OFF Delay) up to 600 seconds with 2 C/O.



Ordering Information

Cat. No.	Description
23GDT0	24-240 VAC/DC, True OFF Delay (Power OFF Delay) Timer, 2 C/O

Electronic Timer - Series Micon® 225



Cat. No.		23GDT0
Parameters		
Timer Description		True OFF Delay (Power OFF Delay) Timer
Mode		True OFF Delay (Power OFF Delay)
Functional Diagram		
Supply Voltage (ϕ)		24 - 240 VAC/DC
Supply Variation		-10 to +20% (of ϕ)
Frequency		50/60 Hz
Power Consumption (Max.)		2.5 VA
Energizing Time		1s (Minimum)
Timing Range		0.6s to 600s
Setting Accuracy		± 5% of Full scale
Repeat Accuracy		± 1%
Output	Relay Output	2 C/O
	Contact Rating	5A @ 240 VAC / 28 VDC (Resistive)
	Electrical Life	1x10 ⁵
	Mechanical Life	1x10 ⁷
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A
	DC - 13	Rated Voltage (Ue): 24/125/250 V, Rated Current (Ie): 2.0/0.22/0.1 A
Operating Temperature		-15°C to +60°C
Storage Temperature		-20°C to +70°C
Humidity (Non Condensing)		95% (Rh)
LED Indication		Green LED → Power ON, Red LED → Relay ON
Enclosure		Flame Retardant UL94-V0
Dimension (W x H x D) (in mm)		22.5 X 75 X 100.5
Weight (unpacked)		130 g
Mounting		Base / DIN Rail
Certification		
Degree of Protection		IP 20 for Terminals, IP 40 for Enclosure

EMI / EMC

Harmonic Current Emissions	IEC 61000-3-2
ESD	IEC 61000-4-2
Radiated Susceptibility	IEC 61000-4-3
Electrical Fast Transients	IEC 61000-4-4
Surges	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Voltage Dips & Interruptions (DC)	IEC 61000-4-29
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1


Environmental

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6
Repetitive Shock	IEC 60068-2-27
Non-Repetitive Shock	IEC 60068-2-27

Electronic Timer - Series Micon® 225




MOUNTING DIMENSION (mm)

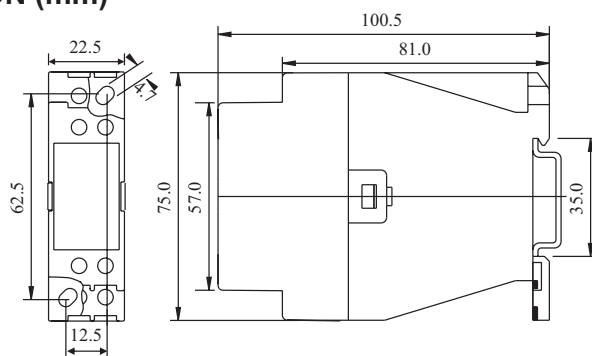


2A5DT5, 2B5DT5, 2AODT5, 2ASDT0, 2ASDT1, 2BSDT0, 2BSDT1, 2AADT5, 20JDTT, 20NDTT, 2ANDT0, 23GDT0, 2A6DT6, 2B6DT6


CONNECTION DIAGRAM

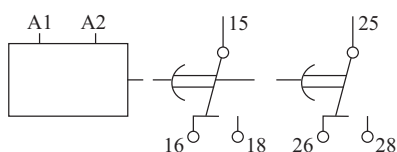


2A5DT5, 2B5DT5, 2AADT5, 23GDT0, 2AODT5

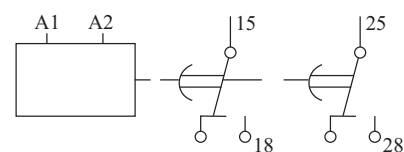


2ASDT0, 2BSDT0, 2ASDT1, 2BSDT1



20JDTT, 20NDTT




2ANDT0

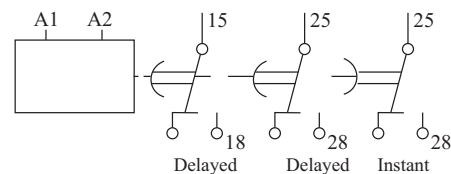

2A6DT6, 2B6DT6

TERMINAL TORQUE & TERMINAL CAPACITY

 Ø 3.5 mm...4.0mm	0.60 N.m (6 Lb.in)
	1 x 4.0 mm ² Solid/Stranded Wire
AWG	1 x 20 to 10