



**SAVEAIR**  
Technologies Pvt Ltd



# Product Catalogue

**Contact For Any Enquiry**

📍 25/1, 12<sup>th</sup> Avenue, Ashok Nagar, Chennai-600083.


☎ 044- 4858 4456 📞 9840261043

✉ [marketing@saveairtechnologies.com](mailto:marketing@saveairtechnologies.com)

🌐 [www.saveairtechnologies.com](http://www.saveairtechnologies.com)

# Electronic Timer - Series Staircase

- Multi Function/Mono Function Staircase Timer in compact 17.5mm
- Time Range: 0.5min - 20min
- Long Run mode with Time range from 0.5h - 20h
- Functions with Pre-Warning, Cut-Off & Release Delay
- Maintenance Mode available
- Switch indications (Glow-lamps / Pilot lamps) upto 50 mA
- 3 Wire & 4 Wire Configurations

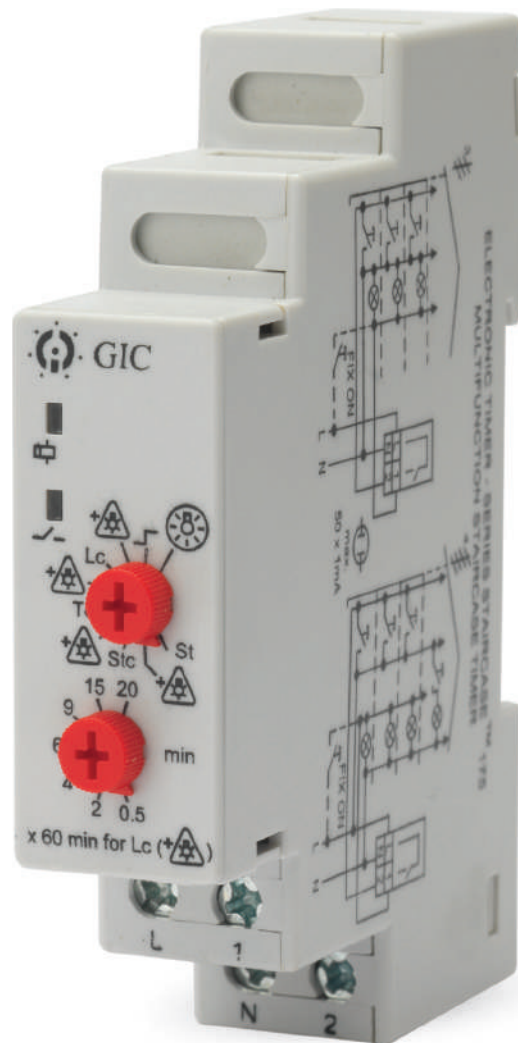

## Ordering Information

|                      |                                 |             |              |                             |                                              |
|----------------------|---------------------------------|-------------|--------------|-----------------------------|----------------------------------------------|
| 27                   |                                 |             | 3            | B                           |                                              |
| <b>Casing Colour</b> |                                 | <b>Mode</b> |              | <b>Output Relay Contact</b> |                                              |
| B                    | Casing: White & Knob: Red       | 1           | C Multi Mode | 1                           | 1 'NO', 16A, 120A/20ms (Peak Inrush Current) |
| C                    | Casing: Dark Grey & Knob: Green | 2           | B Mono Mode  | 2                           | 1 'NO', 16A, 80A/20ms (Peak Inrush Current)  |

\* For Mono Mode the available mode is 'Timing Step with Release Delay & Cut-Off'

# Electronic Timer - Series Staircase



|                               |                                                                                                                                                                                                                                                                                                                                                                      |                                                                      |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <b>Cat. No.</b>               | <b>27B1C3B1</b>                                                                                                                                                                                                                                                                                                                                                      |                                                                      |
| <b>Parameters</b>             |                                                                                                                                                                                                                                                                                                                                                                      |                                                                      |
| Timer Description             | <b>Staircase Timer</b>                                                                                                                                                                                                                                                                                                                                               |                                                                      |
| Modes                         | 1) Staircase Relay<br>2) Staircase Relay with Pre-Warning<br>3) Staircase Relay with Cut-Off<br>4) Staircase Relay with Cut-Off & Pre-Warning<br>5) Timing Step with Release Delay & Cut-Off<br>6) Timing Step with Release Delay, Cut-Off & Pre-Warning<br>7) Long Run<br>8) Long Run with Pre-Warning<br>9) Step Relay<br>10) Permanent ON<br>11) Maintenance Mode |                                                                      |
| Supply Voltage (Φ)            | 230 VAC                                                                                                                                                                                                                                                                                                                                                              |                                                                      |
| Supply Variation              | - 25% to +15% (of Φ)                                                                                                                                                                                                                                                                                                                                                 |                                                                      |
| Frequency                     | 50 Hz                                                                                                                                                                                                                                                                                                                                                                |                                                                      |
| Power Consumption (Max.)      | 3 VA                                                                                                                                                                                                                                                                                                                                                                 |                                                                      |
| Timing Ranges                 | 0.5m, 2m, 4m, 6m, 9m, 15m, 20m (The unit will change from minutes to hours for 'Long Run' modes )                                                                                                                                                                                                                                                                    |                                                                      |
| Reset Time                    | 500 ms (Max.)                                                                                                                                                                                                                                                                                                                                                        |                                                                      |
| Signal Sensing Time           | 40 ms < Ts < 5 s (For modes 1, 2, 3, 4, 5, 6, 9) & Ts ≥ 5s (For modes 7, 8, 11)                                                                                                                                                                                                                                                                                      |                                                                      |
| Maintenance Mode              | If the Relay is 'OFF' and the signal is present for 5 sec or more (Ts ≥ 5 s), the timer will enter 'Maintenance mode'                                                                                                                                                                                                                                                |                                                                      |
| Setting Accuracy              | ± 5% of Marking                                                                                                                                                                                                                                                                                                                                                      |                                                                      |
| Repeat Accuracy               | ± 1%                                                                                                                                                                                                                                                                                                                                                                 |                                                                      |
| Output                        | Relay Output                                                                                                                                                                                                                                                                                                                                                         | 1 NO (Pole is internally shorted with 'Live')                        |
|                               | Contact Rating                                                                                                                                                                                                                                                                                                                                                       | 16A @ 230 VAC (Resistive)                                            |
|                               | Electrical Life                                                                                                                                                                                                                                                                                                                                                      | 1X10 <sup>5</sup>                                                    |
|                               | Mechanical Life                                                                                                                                                                                                                                                                                                                                                      | 5X10 <sup>6</sup>                                                    |
| Utilization Category          | AC - 15                                                                                                                                                                                                                                                                                                                                                              | Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A         |
|                               | DC - 13                                                                                                                                                                                                                                                                                                                                                              | Rated Voltage (Ue): 24/125/250 V, Rated Current (Ie): 2.0/0.22/0.1 A |
| Operating Temperature         | -10°C to +60°C                                                                                                                                                                                                                                                                                                                                                       |                                                                      |
| Storage Temperature           | -15°C to +70°C                                                                                                                                                                                                                                                                                                                                                       |                                                                      |
| LED Indication                | Green LED → Power ON, Yellow LED → Relay ON                                                                                                                                                                                                                                                                                                                          |                                                                      |
| Enclosure                     | Flame Retardant UL94-V0                                                                                                                                                                                                                                                                                                                                              |                                                                      |
| Dimension (W x H x D) (in mm) | 18 X 85 X 65                                                                                                                                                                                                                                                                                                                                                         |                                                                      |
| Weight (unpacked)             | 70 g                                                                                                                                                                                                                                                                                                                                                                 |                                                                      |
| Mounting                      | DIN Rail                                                                                                                                                                                                                                                                                                                                                             |                                                                      |
| Certification                 |                                                                                                                                                                                                |                                                                      |
| Degree of Protection          | IP 20 for Terminals, IP 30 for Enclosure, IP 40 for Front side                                                                                                                                                                                                                                                                                                       |                                                                      |

## EMI / EMC

|                                   |                |
|-----------------------------------|----------------|
| Harmonic Current Emissions        | IEC 61000-3-2  |
| ESD                               | IEC 61000-4-2  |
| Radiated Susceptibility           | IEC 61000-4-3  |
| Electrical Fast Transients        | IEC 61000-4-4  |
| Surges                            | IEC 61000-4-5  |
| Conducted Susceptibility          | IEC 61000-4-6  |
| Voltage Dips & Interruptions (AC) | IEC 61000-4-11 |
| Voltage Dips & Interruptions (DC) | IEC 61000-4-29 |
| Conducted Emission                | CISPR 14-1     |
| Radiated Emission                 | CISPR 14-1     |

## Environmental

|                      |                |
|----------------------|----------------|
| Cold Heat            | IEC 60068-2-1  |
| Dry Heat             | IEC 60068-2-2  |
| Vibration            | IEC 60068-2-6  |
| Repetitive Shock     | IEC 60068-2-27 |
| Non-Repetitive Shock | IEC 60068-2-27 |


# Electronic Timer - Series Staircase



## FUNCTIONAL DIAGRAM


### 1. STAIRCASE RELAY

On Initial Signal, the output is switched ON & timing starts for the set duration. Subsequent signals during this period will extend the time duration by the value indicated on the timer during run time.

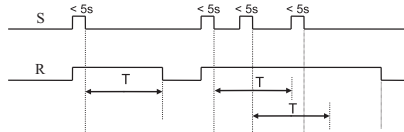


### 3. STAIRCASE RELAY WITH CUT-OFF

On Initial Signal, the output is switched ON & timing starts for the set duration. Subsequent signals during this period will extend the time duration by the value indicated on the timer during run time. If a signal of duration 2 seconds or more is applied, then the output is switched OFF instantly.




### 5. TIMING STEP WITH RELEASE DELAY & CUT-OFF

On Initial Signal, the output is switched 'ON' & timing starts for the set duration. During run time, if a signal of duration less than 2 seconds is applied, it is ignored. If the duration of the signal is 2 seconds or more, then the output is switched OFF instantly.




### 7. LONG RUN

On Initial Signal, the output is switched ON & timing starts for the preset duration. On completion of the time duration the output contacts open. Any signal during the run time is ignored. During run time, if a signal of duration less than 5 seconds is applied, it is ignored. If the duration of the signal is 5 seconds or more, then output is switched OFF instantly.



### 9. STEP RELAY

After every signal, the output changes state, alternately switching from ON to OFF.




### 11. MAINTENANCE MODE

If the relay is OFF and a signal of duration more than 5 seconds is applied, the maintenance mode is activated. In this mode the output is switched ON for a duration of 60 minutes after which it is switched OFF. During this period if a signal of duration more than 5 seconds is applied, the maintenance mode is interrupted and the output is switched OFF. The mode can be activated from any one of the modes (Mode 1, 2, 3, 4, 5, 6 & 9) provided that the output is switched OFF initially.

S: Supply, R: Relay Output, T: Preset Time, t: 10 seconds


### 2. STAIRCASE RELAY WITH PRE-WARNING

On Initial Signal, the output is switched ON & timing starts for the preset duration. On completion of the set time duration the output blinks once & after a delay of 10 seconds, it blinks twice. After a further delay of 10 seconds, the output is switched OFF. Any signal during the run time or the pre-warning period will extend the time duration by the value indicated on the timer during run time.

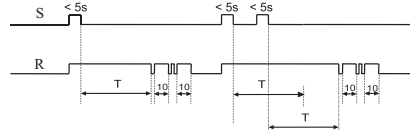


### 4. STAIRCASE RELAY WITH CUT-OFF & PRE-WARNING

On Initial Signal, the output is switched ON & timing starts for the set duration. On completion of the set time duration the output blinks once & after a delay of 10 seconds, it blinks twice. After a further delay of 10 seconds, the output is switched OFF. Any signal during the run time or the pre-warning period will extend the time duration by the value indicated on the timer during run time. If a signal of duration 2 seconds or more is applied, then the output is switched OFF after completion of the pre-warning period.




### 6. TIMING STEP WITH RELEASE DELAY & CUT-OFF & PRE-WARNING

On Initial Signal, the output is switched 'ON' & timing starts for the set duration. On completion of the set time duration the output blinks once & after a delay of 10 seconds, it blinks twice. After a further delay of 10 seconds, the output is switched 'OFF'. During run time, if a signal of duration less than 2 seconds is applied, it is ignored. If the duration of the signal is 2 seconds or more, then the output is switched OFF after completion of the pre-warning period.

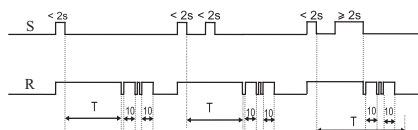



### 8. LONG RUN WITH PRE-WARNING

On Initial Signal, the output is switched 'ON' & timing starts for the preset duration. On completion of the set time duration the output blinks once & after a delay of 10 seconds, it blinks twice. After a further delay of 10 seconds, the output is switched OFF. During run time, if a signal of duration less than 5 seconds is applied, it is ignored. If the duration of the signal is 5 seconds or more, then output is switched OFF after completion of the prewarning period.

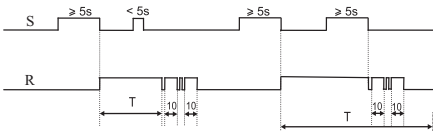

### 10. PERMANENT ON

In this mode the output contacts are permanently closed until the mode is changed and the device is reset.

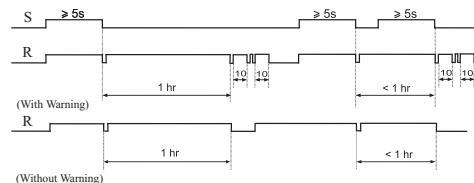

Pre-Warning: On completion of the set time duration the output blinks once & again blinks twice after a delay of 10 seconds and the contacts open after a further delay of 10 seconds.